

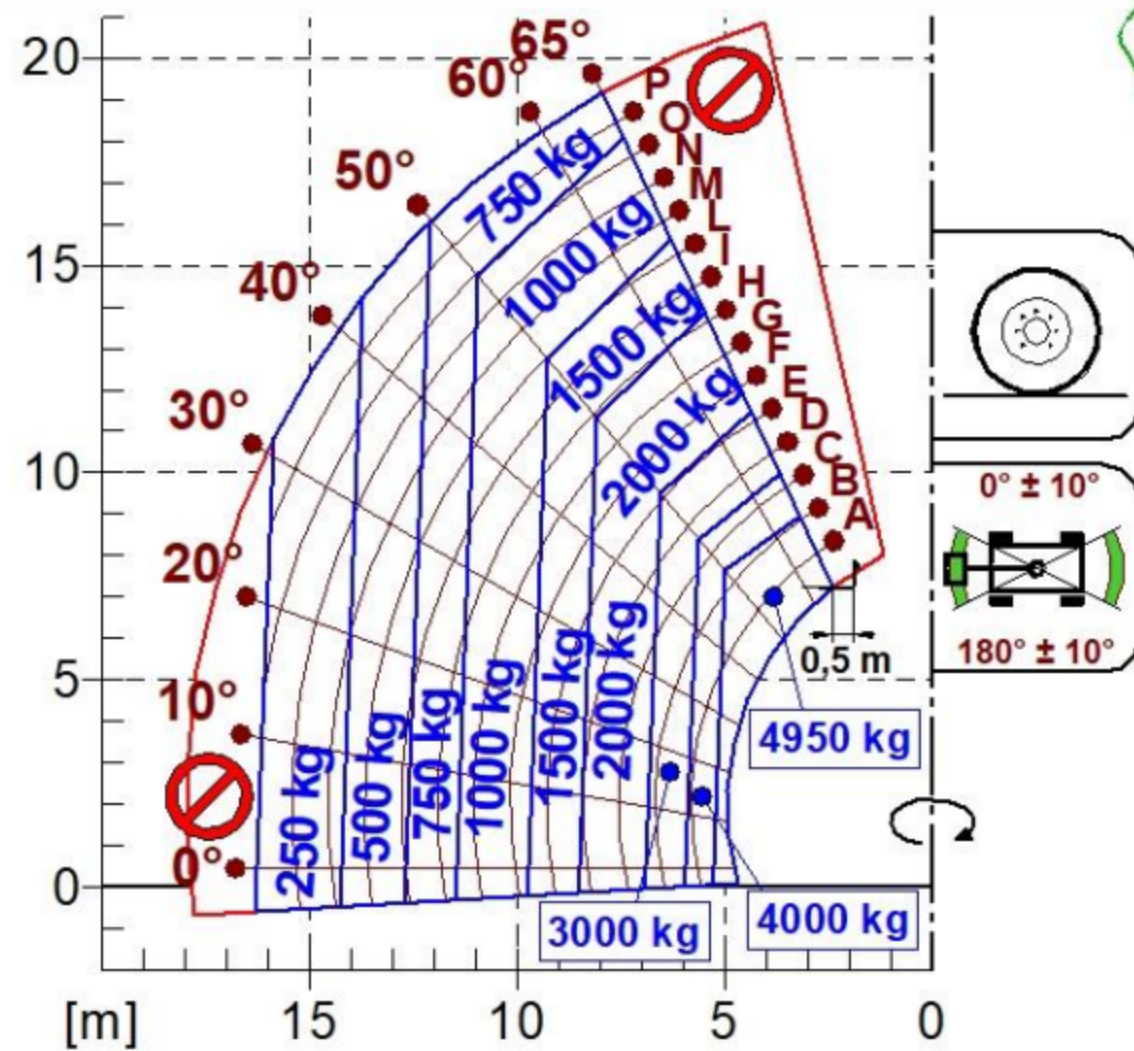



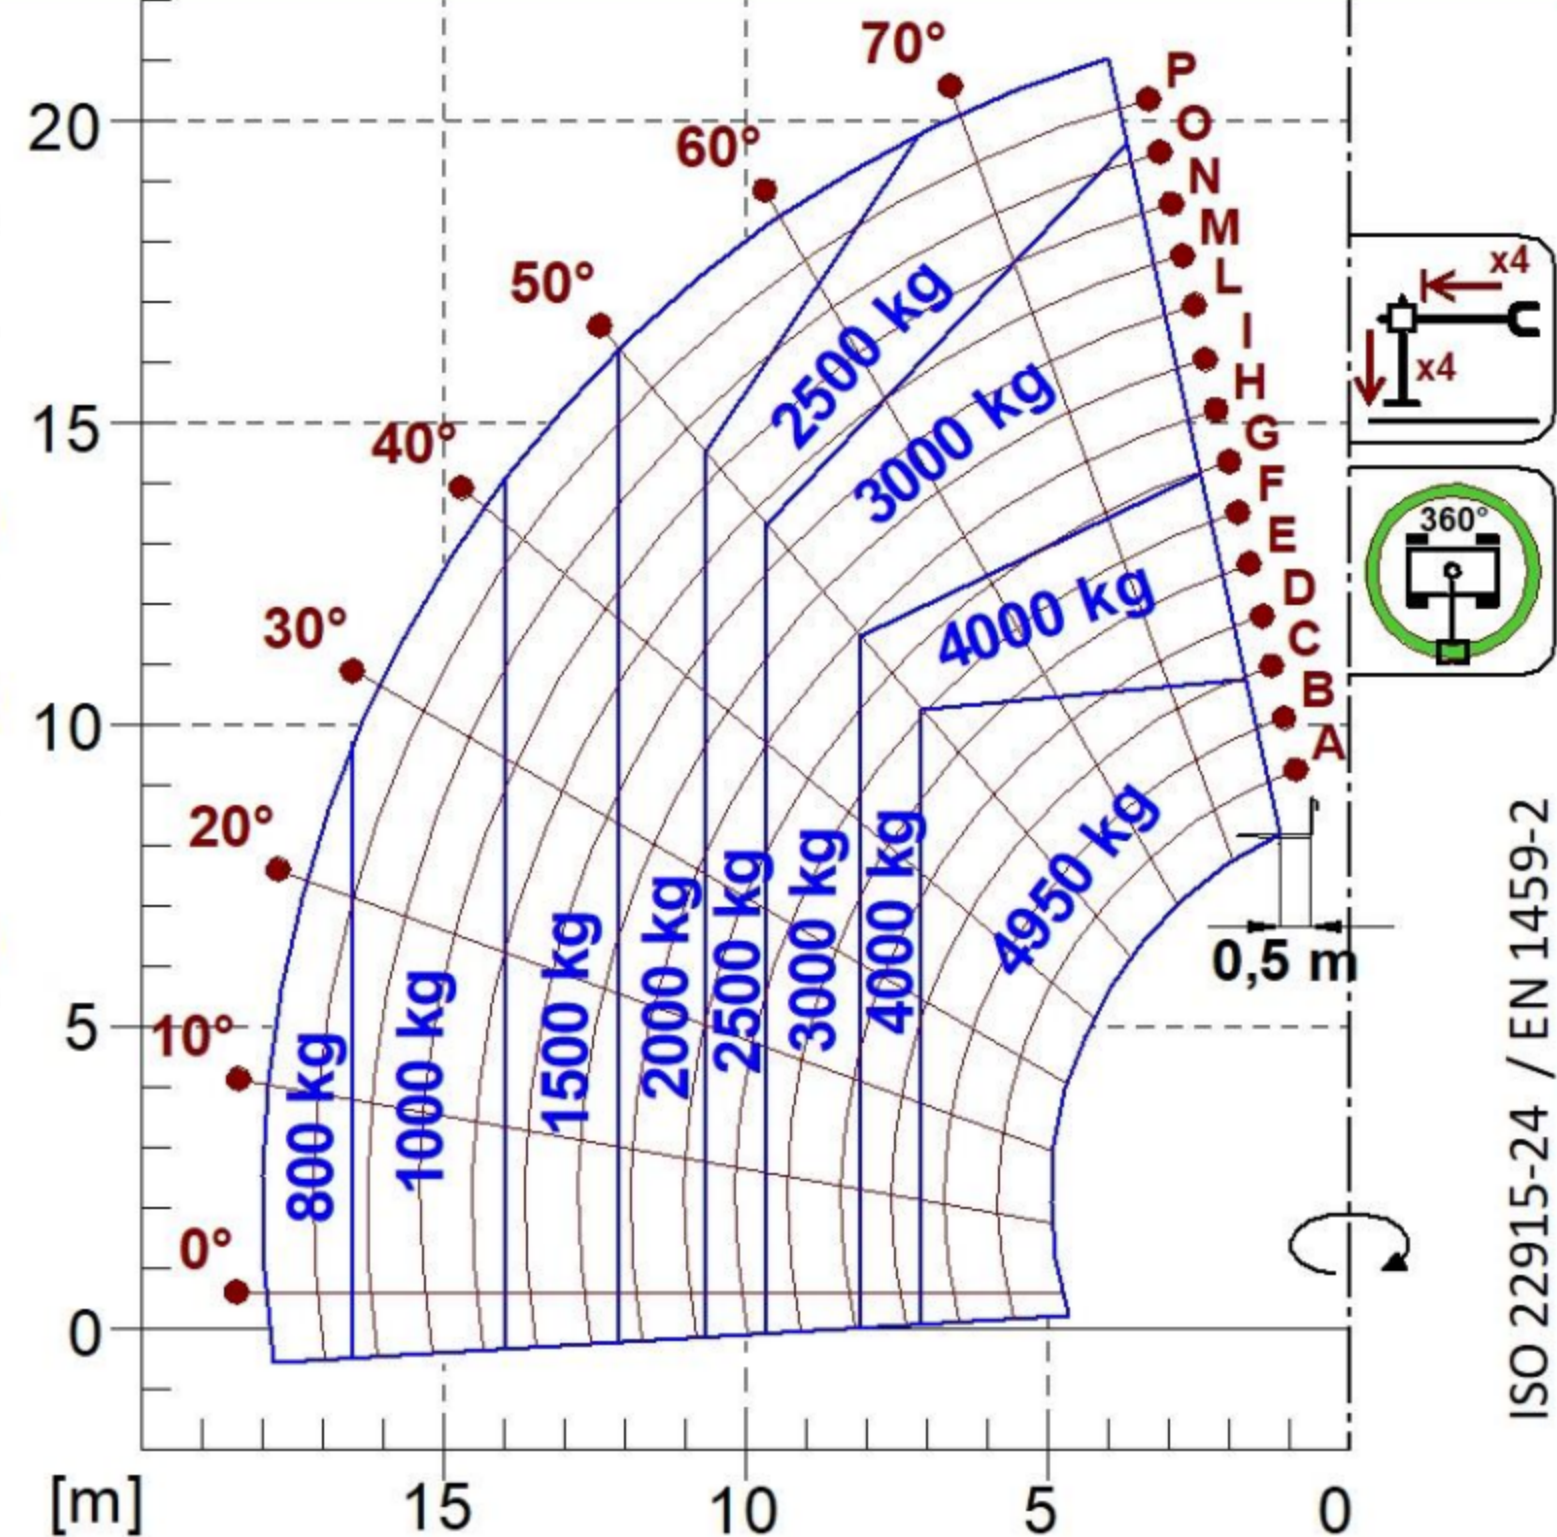

MERLO ROTO50.21

A0311		
A0200+A0500	-200 kg	MAX
A0201+A0500		4500 kg
A0210+A0500		
A0211+A0500		
A0100+A0500	-150 kg	MAX
A0271		4500 kg
A0291		
A0292		
A0293	-100 kg	MAX
A0294		1500 kg

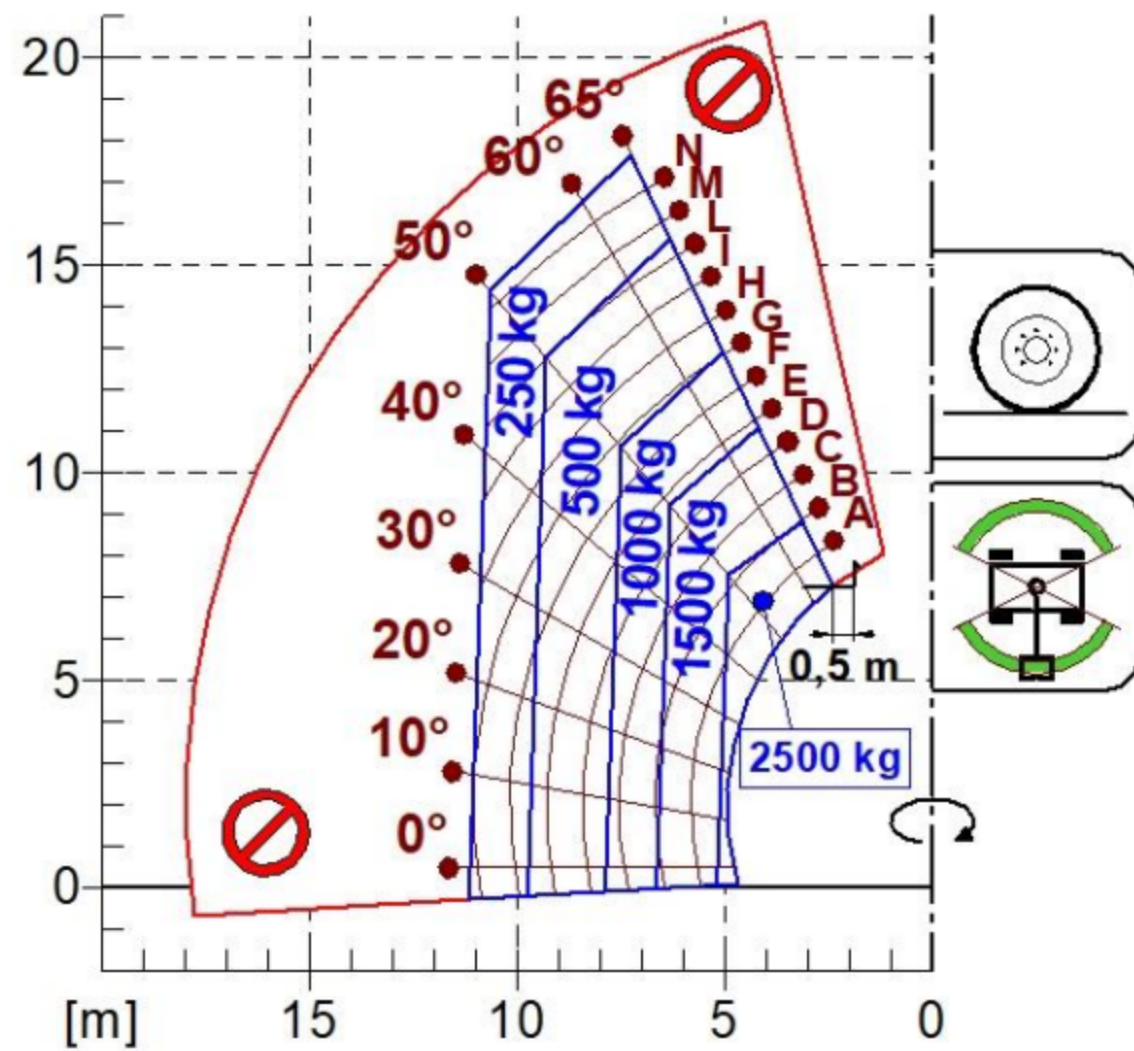

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)


0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

0 ± 1°
(± 2%)

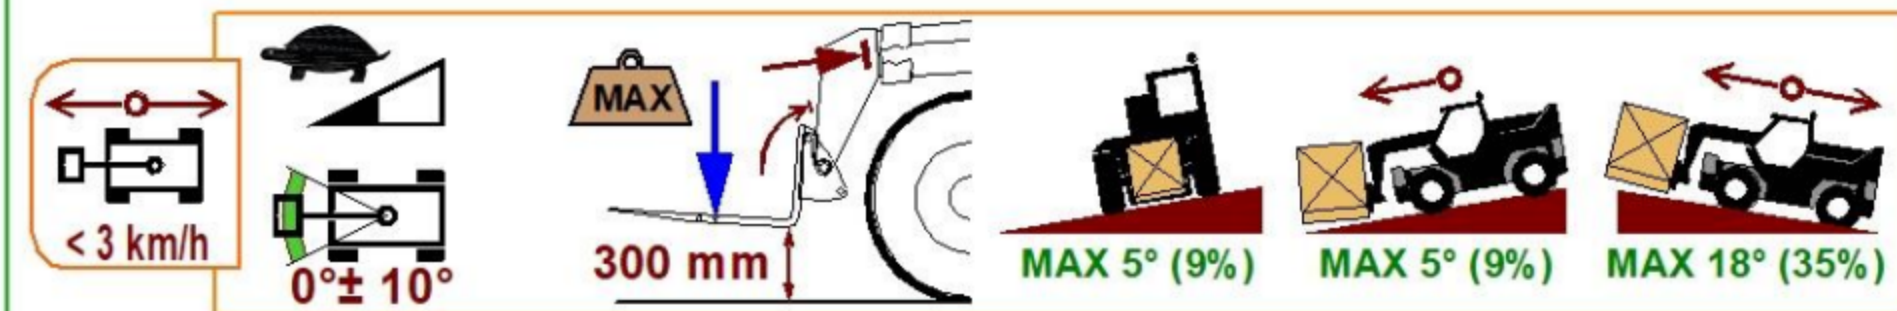

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

MAX 5° (9%) MAX 5° (9%) MAX 18° (35%)

ISO 22915-24 / EN 1459-2